


kaneka™
LUCE



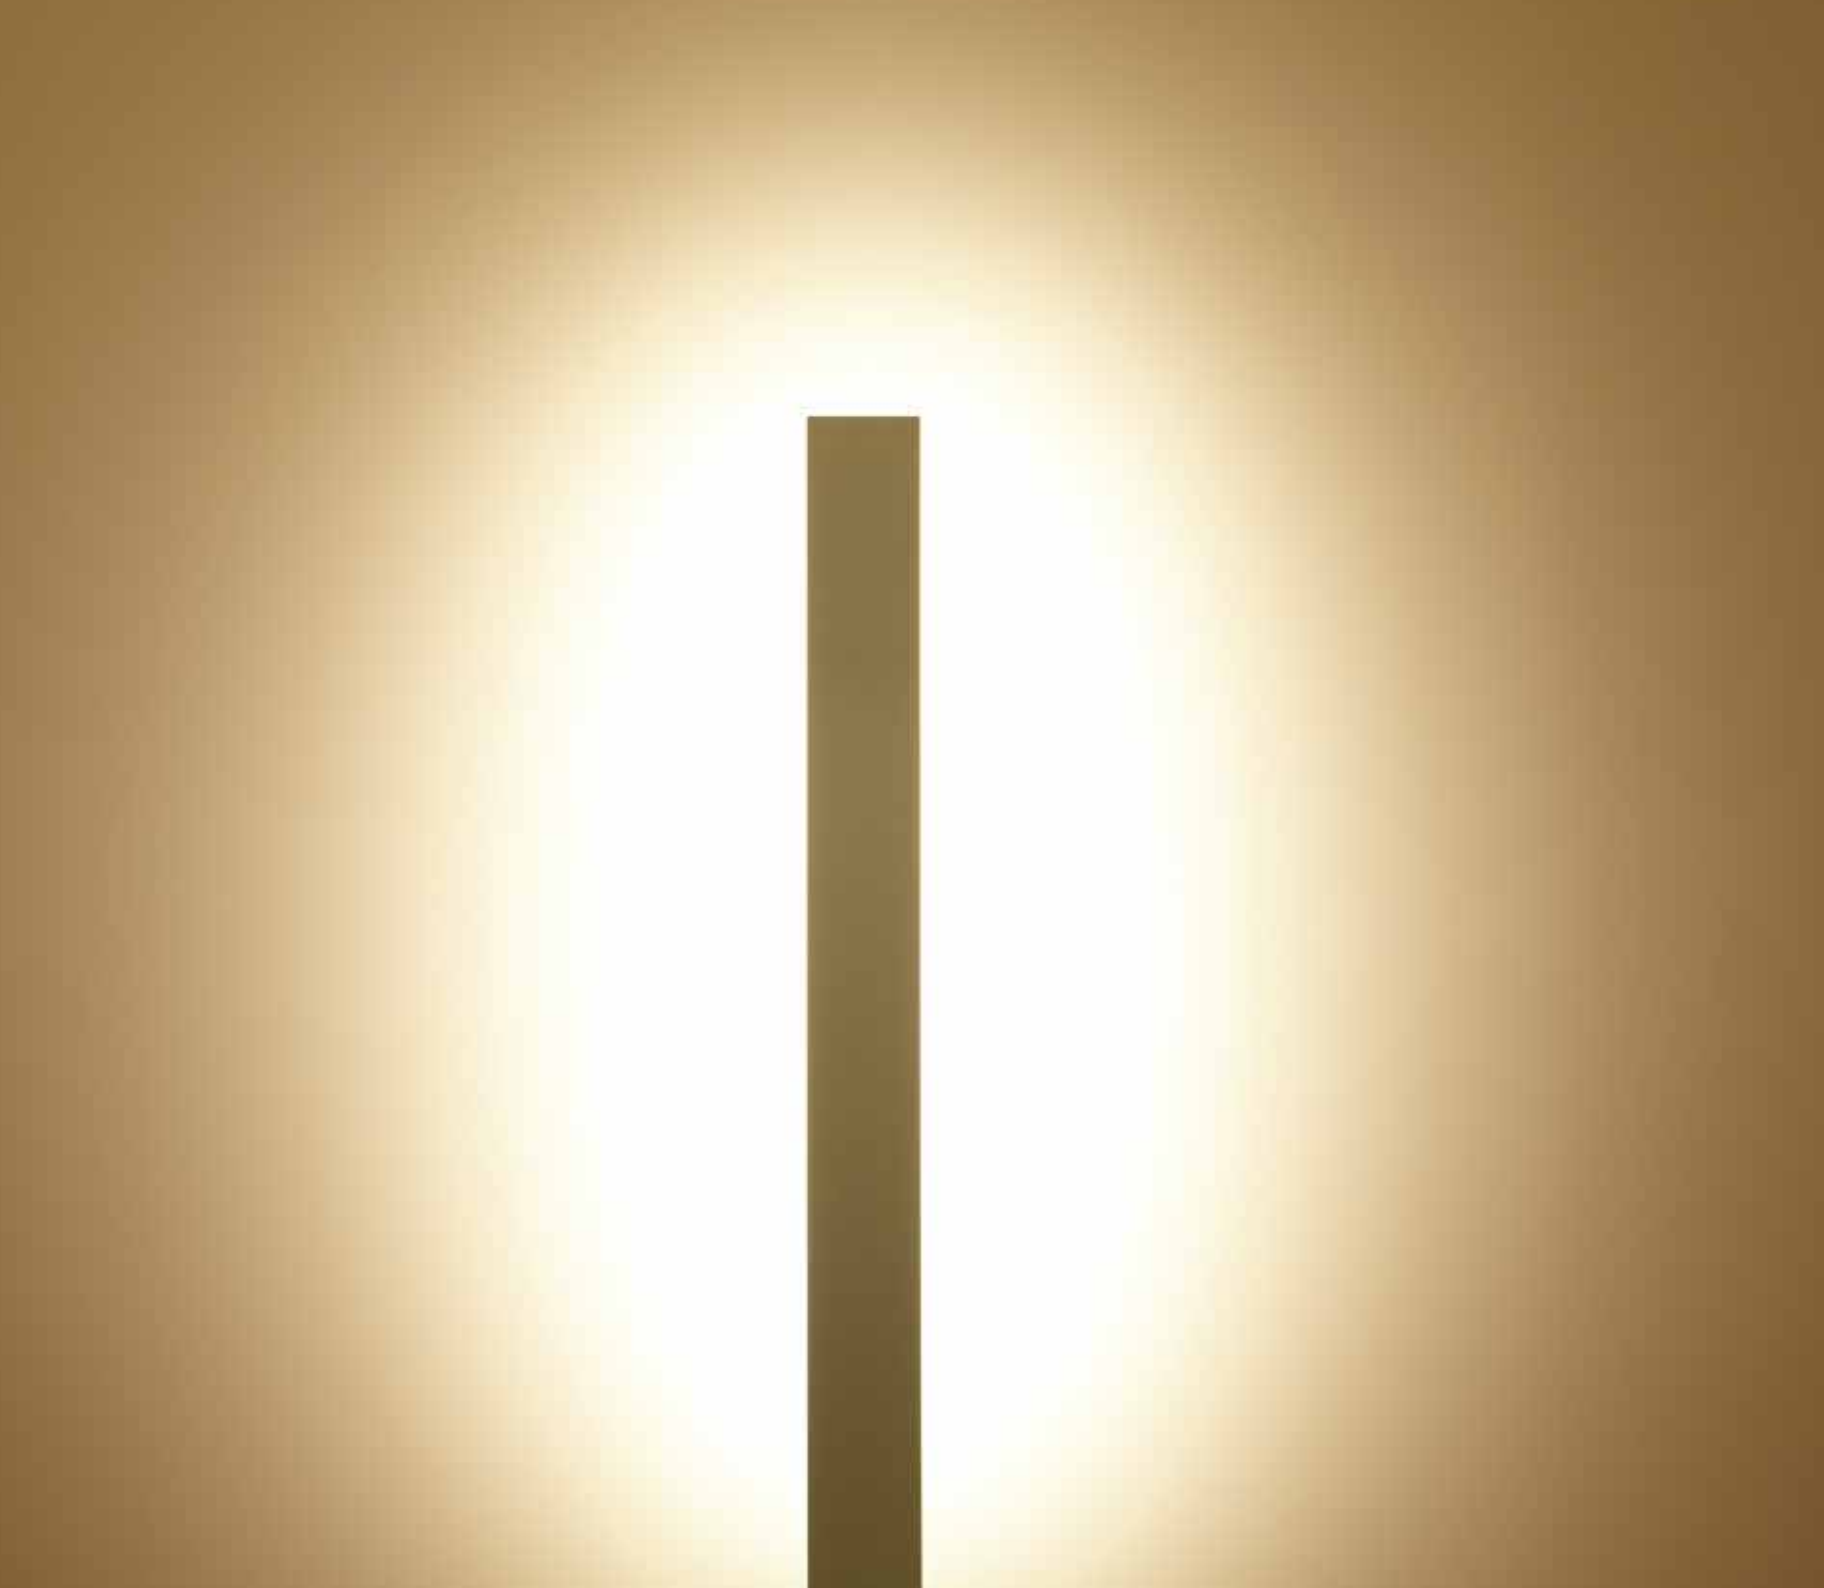

A refinement built on light and shadows—natural light radiating a feeling of calm.

KANEKA LUCE is a new brand of lighting that adopts the soft illumination produced by KANEKA OLEDs.

Light bounces off walls to bring more natural luminance and create soft shadows, resulting in spaces that radiate a feeling of quality and refinement. The simple design of KANEKA LUCE matches any interior and reflects a desire to showcase the spaces created by our light.

Light is about more than just brightness and service life—light is beautiful. Appreciating this beauty adds richness to our lives.

We want you to experience the joy of designing your own space, with the illumination created by the KANEKA LUCE series.



Designer



SHOZO TOYOHISA

Even when lighting the artwork in a picture gallery or the exhibits at an event, Kaneka's OLED demonstrates why it is an evolutionary lighting technology. When I first encountered the gentle light spilling evenly from the ultra-slim 1.1 mm panels, I felt confident that we had created exquisite spaces where light and shade blend in perfect harmony, conveying a sensibility unique to Japanese culture.

My foremost desire with the new Kaneka LUCE line is for more people to experience the joy of designing the perfect space with the soft illumination produced by OLED.


■ Profile

Lighting Designer.

Shozo Toyohisa has had an award-winning career as a lighting designer working for the finest private art collections, retail locations and museums across the world. He received international acclaim for his optical fiber work at the Gallery of Horyuji Treasures in the Tokyo National Museum and has gone on to design for the Mori Arts Center, the Pola Museum of Art, the Hara Museum of Contemporary Art. In New York, he has designed the lighting for the MoMA "Contemporary Japanese Textiles" exhibition.

Rotatable Floor Light

KANEKA LUCE F1

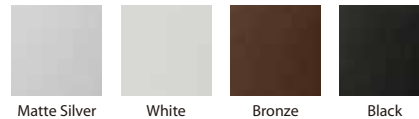

Rotatable Wall Light

KANEKA LUCE W1



- Dry location use only.
- The wiring of the power cord is necessary at the time of installation.
- Actual fixture colors may vary from images.
- Production information is subject to change without notice.

KANEKA CORPORATION OLED Business Development Project

1-12-32, Akasaka, Minato-ku Tokyo 107-6028

TEL +81 -3-5574-8009

URL: <https://www.kanekaoled.jp/en/> email: oled-market@kaneka.co.jp

KANEKA AMERICAS HOLDING, INC.

546 Fifth Avenue, 21st Floor

New York, NY 10036

email: info.oled@kaneka.com

KANEKA BELGIUM N.V.

NiJverheidsstraat 16 B-2260

Westerlo-Oevel Belgium

email: info.oled@kaneka.be

Catalog contents: May 2017
OBK-705-501/001

Living room



Bedroom



•Power cord wiring is required at installation. •Actual fixture colors may vary from images.

Rotatable Floor Light KANEKA LUCE F1



Rotatable Wall Light KANEKA LUCE W1



Model number	Color	Matte Silver	KANEKA LUCE F1-MS	KANEKA LUCE W1-MS
		White	KANEKA LUCE F1-WH	KANEKA LUCE W1-WH
		Bronze	KANEKA LUCE F1-BZ	KANEKA LUCE W1-BZ
		Black	KANEKA LUCE F1-BK	-
Product specifications	Color of light source	Warm white		Warm white
	Light source	KANEKA OLED Lighting Panel 3000K High-CRI, 80 x 80 mm, 10 pcs		KANEKA OLED Lighting Panel 3000K High-CRI, 80 x 80 mm, 10 pcs
	Body weight	5,200g (including 950g base plate) / 11.5lb (including 2.1lb base plate)		4,200g (including mounting brackets) / 9.3lb (including mounting brackets)
	Body size	220mm (W), 1,260mm (H), 270mm (D) / 8.66"(W) x 49.6"(H) x 10.6"(D)		1,026mm (W), 100mm (H), 132mm (D) / 10.4" (W) x 3.9" (H) x 5.2" (D)
	Power consumption	60W		60W
	Input power*	AC100-240V, 50-60Hz		AC100-240V, 50-60Hz
	Dimming	PWM		PWM
	Rotate function	Motor-driven (360 degrees maximum)		Motor-driven (360 degrees maximum)
	Accessories	Remote controller included		Remote controller included
	<p>*Please use the AC adapter included with KANEKA LUCE. • Product specifications and figures are representative values. • For panel specifications, please visit www.kanekaoled.jp/en. • Use only in dry locations. • The wiring of the power cord is necessary at the time of installation. • Actual fixture colors may vary from images. • Production information is subject to change without notice.</p>			

Restaurant




- Actual fixture colors may vary from image.
- The wiring of the power cord is necessary at the time of installation for KANEKA LUCE F2.

- Please follow the instruction manual thoroughly when using this product
- The KANEKA LUCE F2 does not have a lighting function. Please attach the KANEKA LUCE T1 before use.
- Product specifications and figures are representative values.
- The wiring of the power cord is necessary at the time of installation.
- Use only in dry locations.
- Production information is subject to change without notice.

Battery Charger

KANEKA LUCE F2



- The Photo image is KANEKA LUCE F1 with KANEKA LUCE T1 attached.
- As the photo is a digital image, actual color of product may slightly vary from image.

Model number

Color	Model Number
Matte Silver	KANEKA LUCE F2-MS
White	KANEKA LUCE F2-WH
Bronze	KANEKA LUCE F2-BZ
Black	KANEKA LUCE F2-BK

Product specifications

Body weight	5,400g /11.9lb (without T1 attached) 8,400g /18.5lb (with ten T1 attached)
Body size	280mm (W) , 1008mm (H) , 200mm (D) 11.02"(W), 39.68"(H), 7.87"(D)
Power consumption	Approx. 60 W (when charging with ten T1 attached)
Input power *	AC100-240V, 50-60Hz
Number of T1 attachments	Up to 10
Dimming	PWM
Accessories	Remote controller included

Room



· Actual fixture colors may vary from image.

- Please follow the instruction manual thoroughly when using this product.
- Product specifications and figures are representative values.
- For panel specifications, please visit www.kanekoled.jp/en.
- Use only in dry locations.
- Production information is subject to change without notice.

Rechargeable Light

KANEKA LUCE T1



· As the photo is a digital image, actual color of product may slightly vary from image.

Model number

Color	Matte Silver	KANEKA LUCE T1-MS
	White	KANEKA LUCE T1-WH
	Bronze	KANEKA LUCE T1-BZ
	Black	KANEKA LUCE T1-BK

Product specifications

Color of light source	Warm white
Light source	KANEKA OLED Lighting Panel 3000K High-CRI, 80 x 80 mm, 1 pcs
Body weight	300g (including battery) / 0.7lb (including battery)
Body size	95mm (W), 123mm (H), 60mm (D) / 3.74"(W) 4.84x"(H) x 2.36"(D)
Power consumption	2W
Exclusive USB battery charger input	AC100-240V, 50-60Hz
Exclusive USB battery charger output	DC5V/1A (USB output)
Dimming	PWM
Charging method / based on fully charged battery	Exclusive USB battery charger, or Battery Charger KANEKA LUCE F2
Operating time with continuous use	When fully lit: approx. 5 hours
Charging time	When off: approx. 3 hours/ When on: approx. 7 hours

KANEKA CORPORATION OLED Business Development Project

1-12-32, Akasaka, Minato-ku Tokyo 107-6028

TEL +81 -3-5574-8009

URL: <http://www.kanekoled.jp/en/> email: oled-market@kaneka.co.jp

KANEKA AMERICAS HOLDING, INC.

546 Fifth Avenue, 21st Floor

New York, NY 10036

email: info.oled@kaneka.com

KANEKA BELGIUM N.V.

NiJverheidsstraat 16 B-2260

Westerlo-Oevel Belgium

email: info.oled@kaneka.be

Catalog contents: May 2017
OBK-707-501/001